



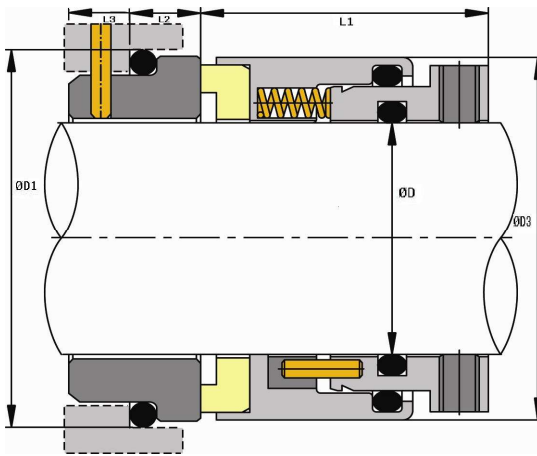

# Type 40L

## VULCAN STANDARD SIZES

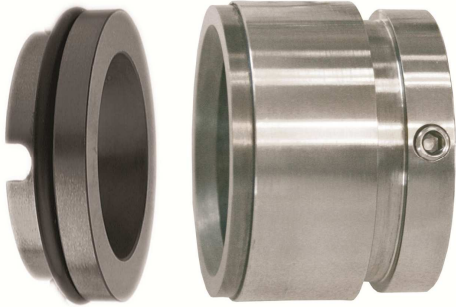

Metric Size D	Size Code	D1	D2	D3	L1	L2	L3	L TOT	SLOT WIDTH	SLOT DEPTH
18	0190	33.00	26.60	32.50	30.00	10.00	17.00	40.00	5.00	5.50
20	0200	35.00	28.60	34.50	30.00	10.00	17.00	40.00	5.00	5.50
22	0220	37.00	30.60	36.50	30.00	10.00	17.00	40.00	5.00	5.50
24	0240	39.00	32.60	38.50	30.00	10.00	17.00	40.00	5.00	5.50
25	0250	40.00	33.60	39.50	30.00	10.00	17.00	40.00	5.00	5.50
28	0280	43.00	36.60	42.50	32.50	10.00	17.00	42.50	5.00	5.50
30	0300	45.00	38.60	44.50	32.50	10.00	17.00	42.50	5.00	5.50
32	0320	48.00	41.60	46.00	32.50	10.00	17.00	42.50	5.00	5.50
33	0330	48.00	41.60	47.00	32.50	10.00	17.00	42.50	5.00	5.50
35	0350	50.00	43.80	49.30	32.50	10.00	17.00	42.50	5.00	5.50
38	0380	56.00	48.80	52.80	34.00	11.00	18.00	45.00	5.00	5.50
40	0400	58.00	50.80	56.00	34.00	11.00	18.00	45.00	5.00	5.50
43	0430	61.00	53.80	59.00	34.00	11.00	18.00	45.00	5.00	5.50
45	0450	63.00	55.80	59.00	34.00	11.00	18.00	45.00	5.00	5.50
48	0480	66.00	58.80	62.40	34.00	11.00	18.00	45.00	5.00	5.50
50	0500	70.00	61.30	65.60	34.50	13.00	20.00	47.50	5.00	5.50
53	0530	73.00	64.30	68.80	34.50	13.00	20.00	47.50	5.00	5.50
55	0550	75.00	66.30	70.80	34.50	13.00	20.00	47.50	5.00	5.50
58	0580	78.00	69.30	75.20	34.50	13.00	20.00	47.50	5.00	5.50
60	0600	80.00	71.30	75.20	34.50	13.00	20.00	47.50	5.00	5.50
63	0630	83.00	74.30	78.30	34.50	13.00	20.00	47.50	5.00	5.50
65	0650	85.00	76.30	84.20	36.50	13.00	20.00	49.50	5.00	5.50
68	0680	90.00	80.50	85.50	36.50	15.30	22.00	51.80	5.00	5.50
70	0700	92.00	82.60	87.50	36.50	15.30	22.00	51.80	5.00	5.50
75	0750	97.00	87.60	92.70	36.50	15.30	22.00	51.80	5.00	5.50
80	0800	105.00	94.70	100.00	36.50	15.70	23.00	52.20	5.00	5.50
85	0850	110.00	99.70	103.00	36.50	15.70	23.00	52.20	5.00	5.50
90	0900	115.00	104.70	109.60	36.50	15.70	23.00	52.20	5.00	5.50
95	0950	120.00	109.70	112.80	36.50	15.70	23.00	52.20	5.00	5.50
100	1000	125.00	114.70	117.50	36.50	15.70	23.00	52.20	5.00	5.50

Metric shaft size 'O'-ring mounted, balanced, multi-spring, non-clogging, set-screw driven seal with long style 'O'-ring mounted seat with anti-rotation provision, to DIN housing sizes.

**STANDARD FACE MATERIALS**  
 Rotary Face: Antimony Impregnated Carbon, Q1 Sintered Silicon Carbide, Tungsten Carbide  
 Seat Ring: Q1 Sintered Silicon Carbide, Q2 RB Silicon Carbide, Tungsten Carbide

### Suggested Operating Limits

Pressure 40bar / 580psi      Speed 25m/s  
 Temperature -40 to +200°C  
 Limits are dependant upon shaft size, shaft speed, temperature, and media to be sealed.